

ARMY RESEARCH LABORATORY



A Twisted Turbine Blade Analysis for a Gas Turbine Engine

by T. A. Korjack

ARL-TR-1469

August 1997

DMIC QUALITY INSPECTED &

Approved for public release; distribution is unlimited.

19971002 048

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Abstract

An analysis of a twisted turbine blade was performed to determine the regions of maximum stress and moment which occur on a typical gas turbine engine under variable revolutions per second. An extension of the Holzer and Myklestad methods was developed to simulate shear and moment effects occurring from the root of the blade to its outermost extremity. Under numerical simulations, shear force and moments of inertia were realized at changing revolutions per minute by solving the Den Hartog twisted blade equations.

Table of Contents

	<u>Page</u>
List of Figures	v
1. Introduction	1
2. Analysis	2
3. Results	5
4. References	11
Distribution List	13
Report Documentation Page	17

INTENTIONALLY LEFT BLANK.

List of Figures

<u>Figure</u>	<u>Page</u>
1. Distribution of Axial Shear Force Along Blade Stations for Variable Revolutions Per Minute	7
2. Distribution of Transverse Shear Force Along Blade Stations for Variable Revolutions Per Minute	8
3. Distribution of Axial Moment Along Blade Stations for Variable Revolutions Per Minute	9
4. Distribution of Transverse Moment Along Blade Stations for Variable Revolutions Per Minute	10

INTENTIONALLY LEFT BLANK.

1. Introduction

The usual method for determining the natural frequencies or critical speeds of shafts or beams in bending is the iteration method of Stodola (Anderson 1967; Crandal 1956; Den Hartog 1956; Harris and Crede 1961; Kelly and Richman 1971; Meirovitch 1967; Timoshenko, Young, and Weaver 1967; Tong 1960; Vernon 1967; Andronow and Chaiken 1949; Cunningham 1958; Minorisky 1962; Stoker 1950) either in graph or numerical form. In addition, another extension was introduced called the Holzer method, which has been applied to flexural vibration. In the torsional problem, the angle and twisting moments are significant calculational quantities; in the flexural problem, there are usually the deflection, the slope, the bending moment, and the shear force, which are pertinent and relevant quantities. It is necessary to find the relations among these quantities from one section (station) to another along a turbine blade of constant cross section (nontwisted).

Field and point transfer matrices may also be used to obtain relations that govern the flexural motion and vibrations of turbine blades. The transfer matrices are suitable for solution by the Myklestad method (Tse 1978), which is essentially a Holzer procedure where the primary difference lies in the use of the equations for bending and the manipulation of these equations to solve readily in terms of the boundary conditions for the blade itself; in this particular case, a remainder slope is used as the test for the selection of the correct frequency.

However, the Myklestad, and/or Holzer method, can be extended to more complicated cases, for example, to a twisted turbine blade in which the principal axes of bending stiffness turn through an angle along the blade length. Then, a vibration in one plane is no longer possible (i.e., the motion in the axial direction is coupled to that in the tangential direction). Hence, the purpose of this report is to analyze the shear and moments of a typical twisted turbine blade as extracted from a gas turbine engine. The information yielded in this analysis will aid and assist the understanding of the mechanical vibrations anomalies associated with the Turbine Engine Diagnostics (TED) project (Helfman, Dumer, and Hanratty 1995) to develop acoustical signatures necessary for performance assessment and prediction.

2. Analysis

Let the axial direction be x , the tangential direction be y , and the radial direction along the blade be z . First calculate the mass per unit length, μ_1 , the bending stiffnesses, I_x and I_y , in the axial and tangential directions, and the product of inertia, I_{xy} , or stiffness coupling. All of these are variable with the length z . Then cut the blade into a number of sections; take the average value of μ_1 , I_x , I_y , and I_{xy} of each section and consider these values constant along each section. The vibration takes place in the x and y coordinates simultaneously so that there will be eight equations. There is cross coupling on account of the product of inertia I_{xy} term. The eight equations are given below without derivation (Den Hartog 1956).

$$S_{x,n+1} = S_{x,n} + m_n \omega^2 x_n, \quad (1)$$

$$S_{y,n+1} = S_{y,n} + m_n \omega^2 y_n, \quad (2)$$

$$M_{x,n+1} = M_{x,n} + S_{x,n+1} L, \quad (3)$$

$$M_{y,n+1} = M_{y,n} + S_{y,n+1} L, \quad (4)$$

$$x'_{n+1} = x'_n + \frac{L}{E(I_{xn} I_{yn} - I_{xyn}^2)} \left[I_{yn} \left(M_{x,n+1} - \frac{S_{x,n+1}}{2} L \right) + I_{xyn} \left(M_{y,n+1} - \frac{S_{y,n+1}}{2} L \right) \right], \quad (5)$$

$$y'_{n+1} = y'_n + \frac{L}{E(I_{xn} I_{yn} - I_{xyn}^2)} \left[I_{xn} \left(M_{y,n+1} - \frac{S_{y,n+1}}{2} L \right) + I_{xyn} \left(M_{x,n+1} - \frac{S_{x,n+1}}{2} L \right) \right], \quad (6)$$

$$x_{n+1} = x_n + x'_n L + \frac{L^2}{E(I_{xn} I_{yn} - I_{xyn}^2)} \left[I_{yn} \left(M_{x,n+1} - \frac{2}{3} S_{x,n+1} L \right) + I_{xyn} \left(M_{y,n+1} - \frac{2}{3} S_{y,n+1} L \right) \right], \quad (7)$$

$$y_{n+1} = y_n + y'_n L + \frac{L^2}{E(I_{xn}I_{yn} - I_{xyn}^2)} \left[I_{xn} \left(M_{y,n+1} - \frac{2}{3} S_{y,n+1} L \right) + I_{xyn} \left(M_{x,n+1} - \frac{2}{3} S_{x,n+1} L \right) \right]. \quad (8)$$

Here,

S_x, S_y represent the shear forces in the x and y directions, respectively;

M_x, M_y represent the moments in the x and y directions, respectively;

m_n is the mass of nth section or station of the twisted blade;

L is the total length of the twisted blade;

I_x, I_y represent the moment of inertia in the x and y directions, respectively;

and I_{xy} is the product of inertia.

The boundary conditions are as follows:

(1) At station zero (root of blade):

$$x = y = x' = y' = 0. \quad (9)$$

The bending moments and shear forces at the root are unknown. Take $M_x = 1, M_y = M_{y0}, S_x = S_{x0}$, and $S_y = S_{y0}$ at the root.

(2) At the free end, we have

$$M_x = M_y = S_x = S_y = 0. \quad (10)$$

The solution methodology will involve casting the set of eight equations in matrix notation to effectuate a solution for given values of the frequency, w . The matrix system to be solved is shown in Table 1 in which the coefficients C_1, \dots, C_{16} can be defined as:

$$C_1 = -L^2 I_y / [E(I_x I_y - I_{xy}^2)] \quad (11)$$

$$C_2 = -2C_1 L / 3 \quad (12)$$

$$C_3 = -L^2 I_{xy} / [E(I_x I_y - I_{xy}^2)] \quad (13)$$

$$C_4 = -2C_3 L / 3 \quad (14)$$

$$C_5 = -L^2 I_x / [E(I_x I_y - I_{xy}^2)] \quad (15)$$

$$C_6 = -2C_5 L / 3 \quad (16)$$

$$C_7 = C_3 \quad (17)$$

$$C_8 = C_4 \quad (18)$$

$$C_9 = C_1 / L \quad (19)$$

$$C_{10} = C_9 L / 2 \quad (20)$$

$$C_{11} = C_3 / L \quad (21)$$

$$C_{12} = -C_{11} L / 2 \quad (22)$$

$$C_{13} = C_5 / L \quad (23)$$

$$C_{14} = -C_{13}L / 2 \quad (24)$$

$$C_{15} = C_3 / L \quad (25)$$

$$C_{16} = -C_{15}L / 2 \quad (26)$$

such that the index, n , has been omitted for convenience.

The solution was achieved through a matrix inversion technique in the IMSL suite of software residing on the Cray C90 in the Waterways Experimental Station. Several values of the angular velocity, ω were varied such as 1,000–9,000 rpm to obtain a realistic range of operating conditions in a gas turbine engine.

3. Results

The distribution of the x -component of the shear stress along various stations on the blade itself at numerous revolutions per minute is shown in Figure 1. Here, the maximum shear takes place next to the root of the blade and then diminishes toward the end or tip of the blade itself, which is very similar to a typical cantilever beam under a uniformly distributed load. Figure 2 depicts the distribution of the y -component of the shear stress at stations along the blade for variable revolutions per minute where again the maximum shear occurs immediately adjacent to the root of the blade as intuitively expected.

Figure 3 illustrates the axial distribution of the x -component moment of inertia for the blade at different stations and at variable revolutions per minute; clearly, it is seen that the moment becomes a maximum at around one third the distance from the root of the blade for the largest revolutions per minute (or for increasing revolutions per minute). Similarly, Figure 4 shows the maximum moment of inertia (y -component) occurring near the immediate vicinity of the root of the blade for large revolutions per minute.

Table 1.



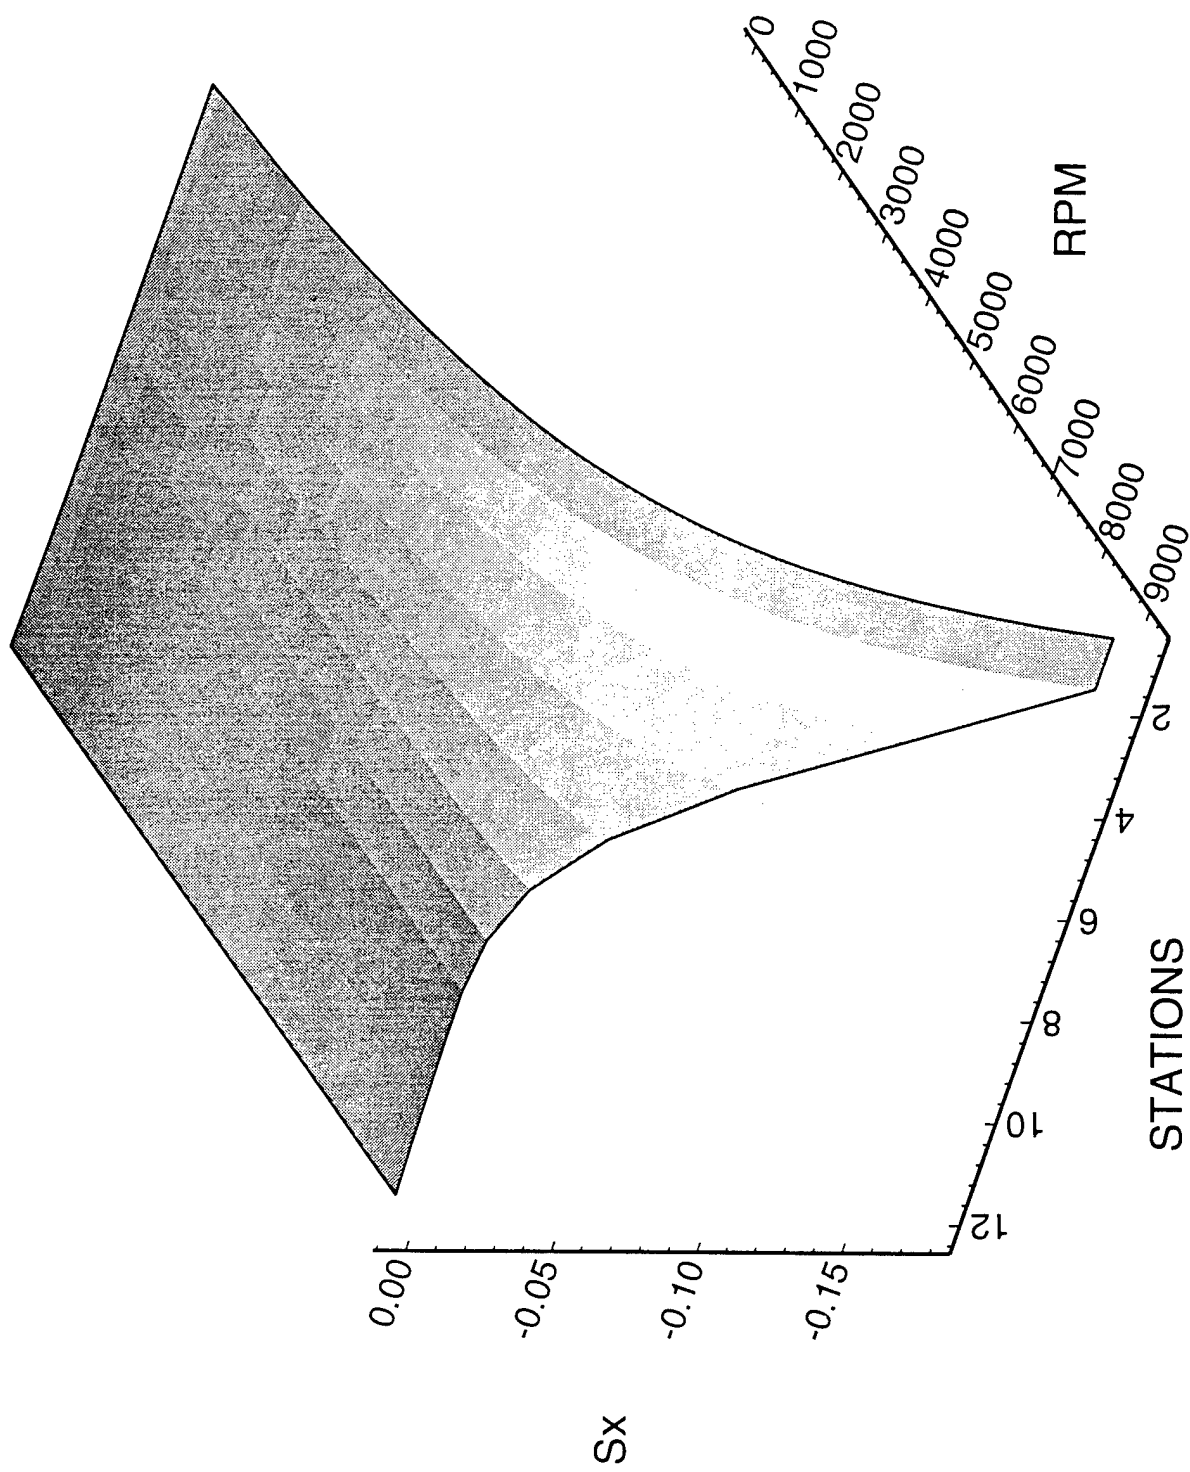


Figure 1. Distribution of Axial Shear Force Along Blade Stations for Variable Revolutions Per Minute.

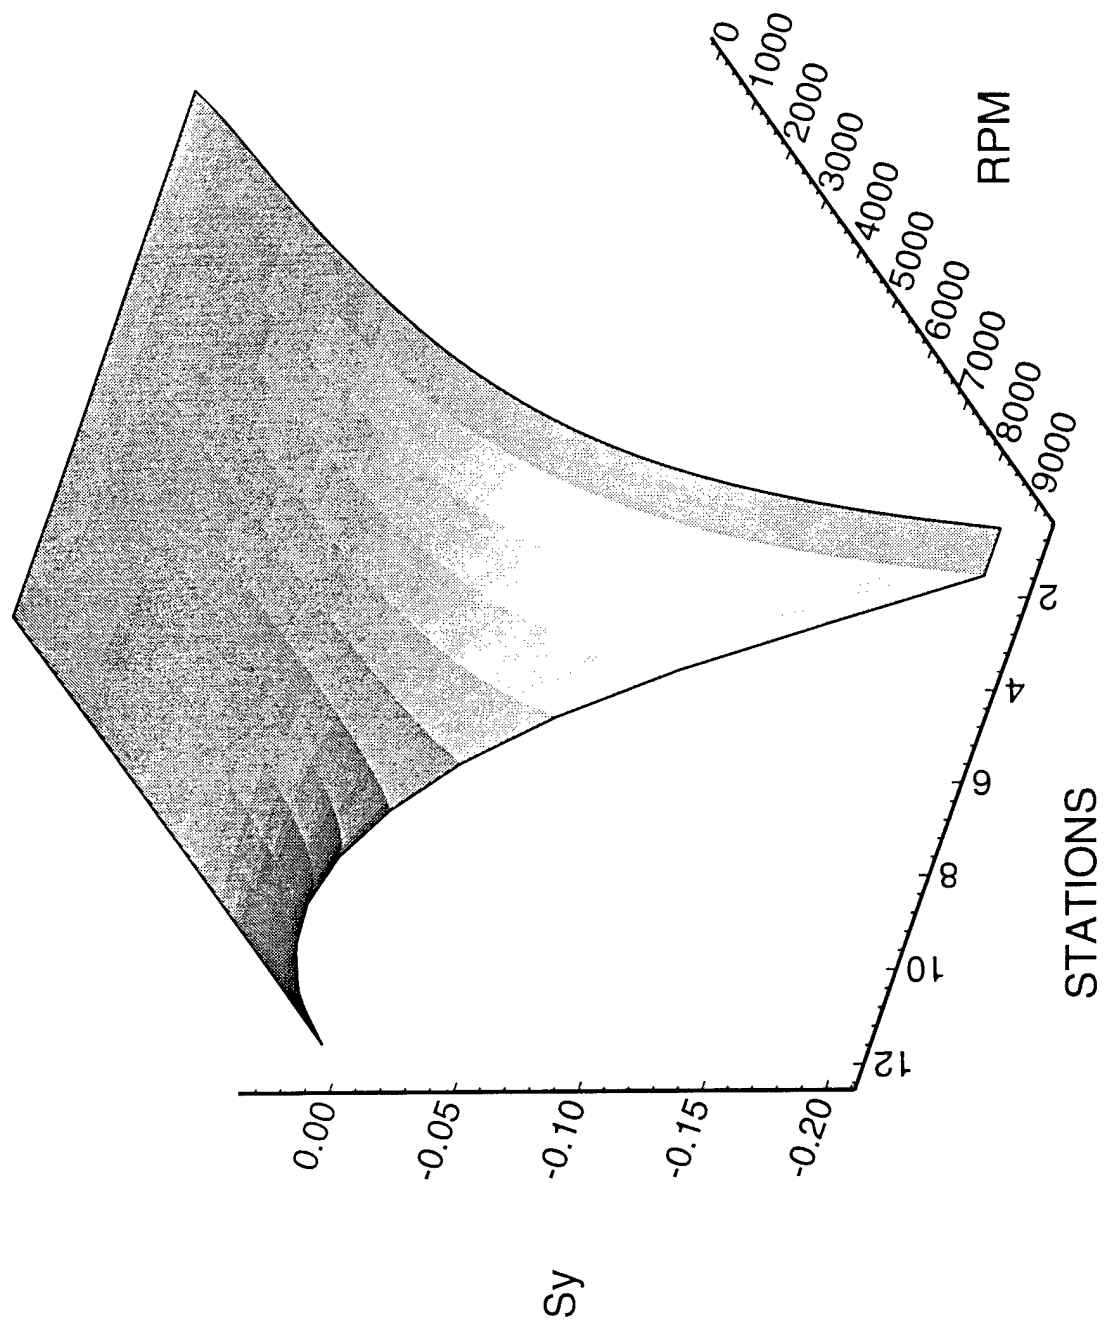


Figure 2. Distribution of Transverse Shear Force Along Blade Stations for Variable Revolutions Per Minute.

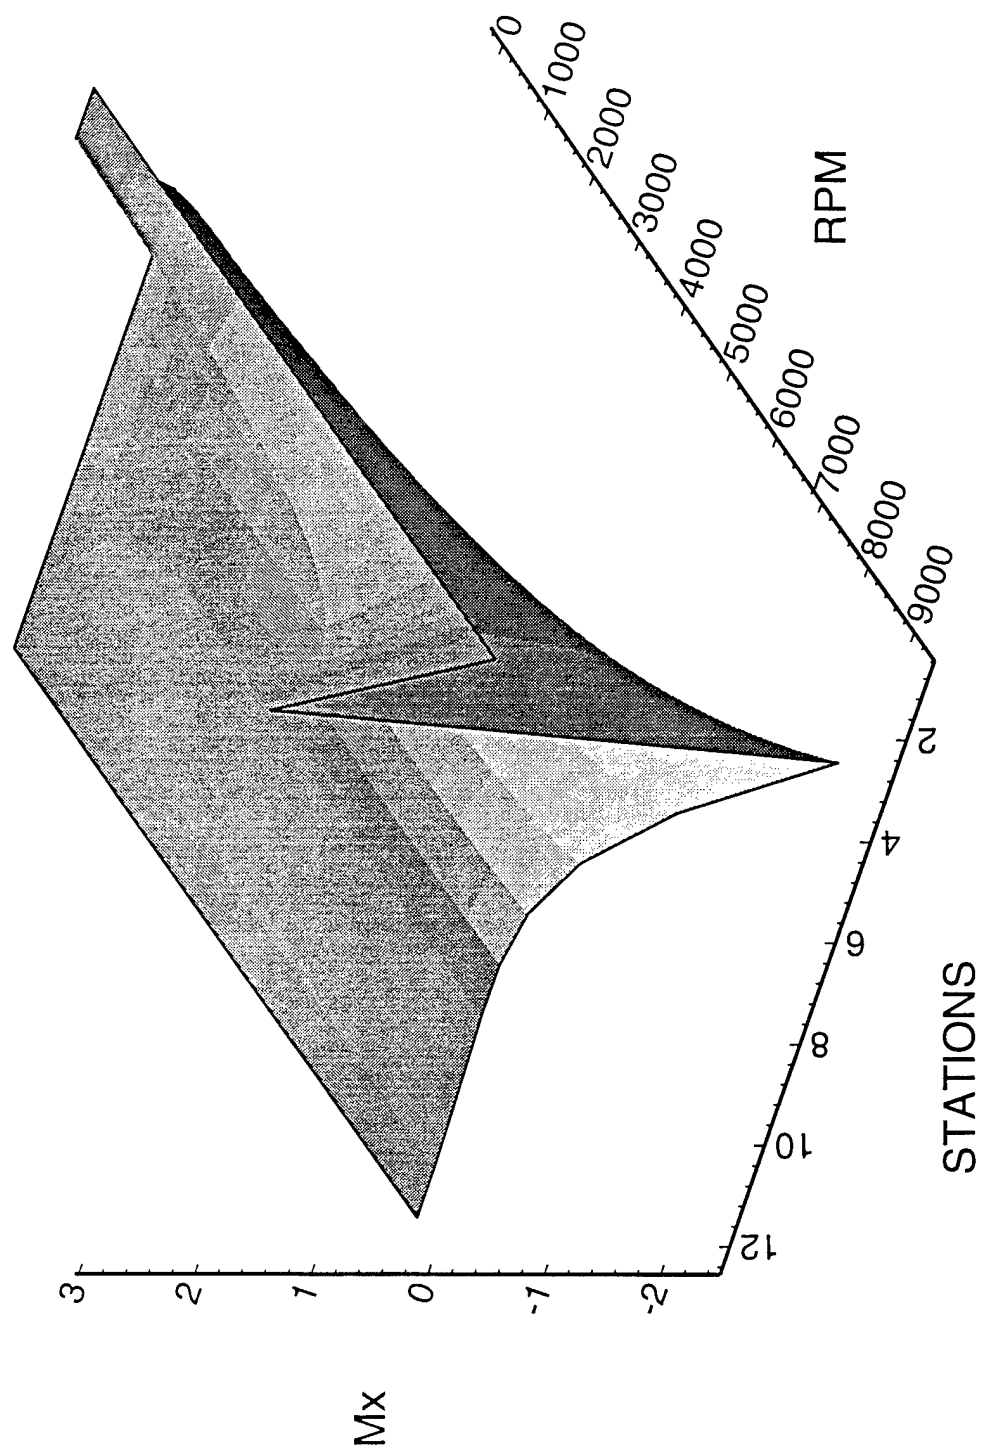


Figure 3. Distribution of Axial Moment Along Blade Stations for Variable Revolutions Per Minute.

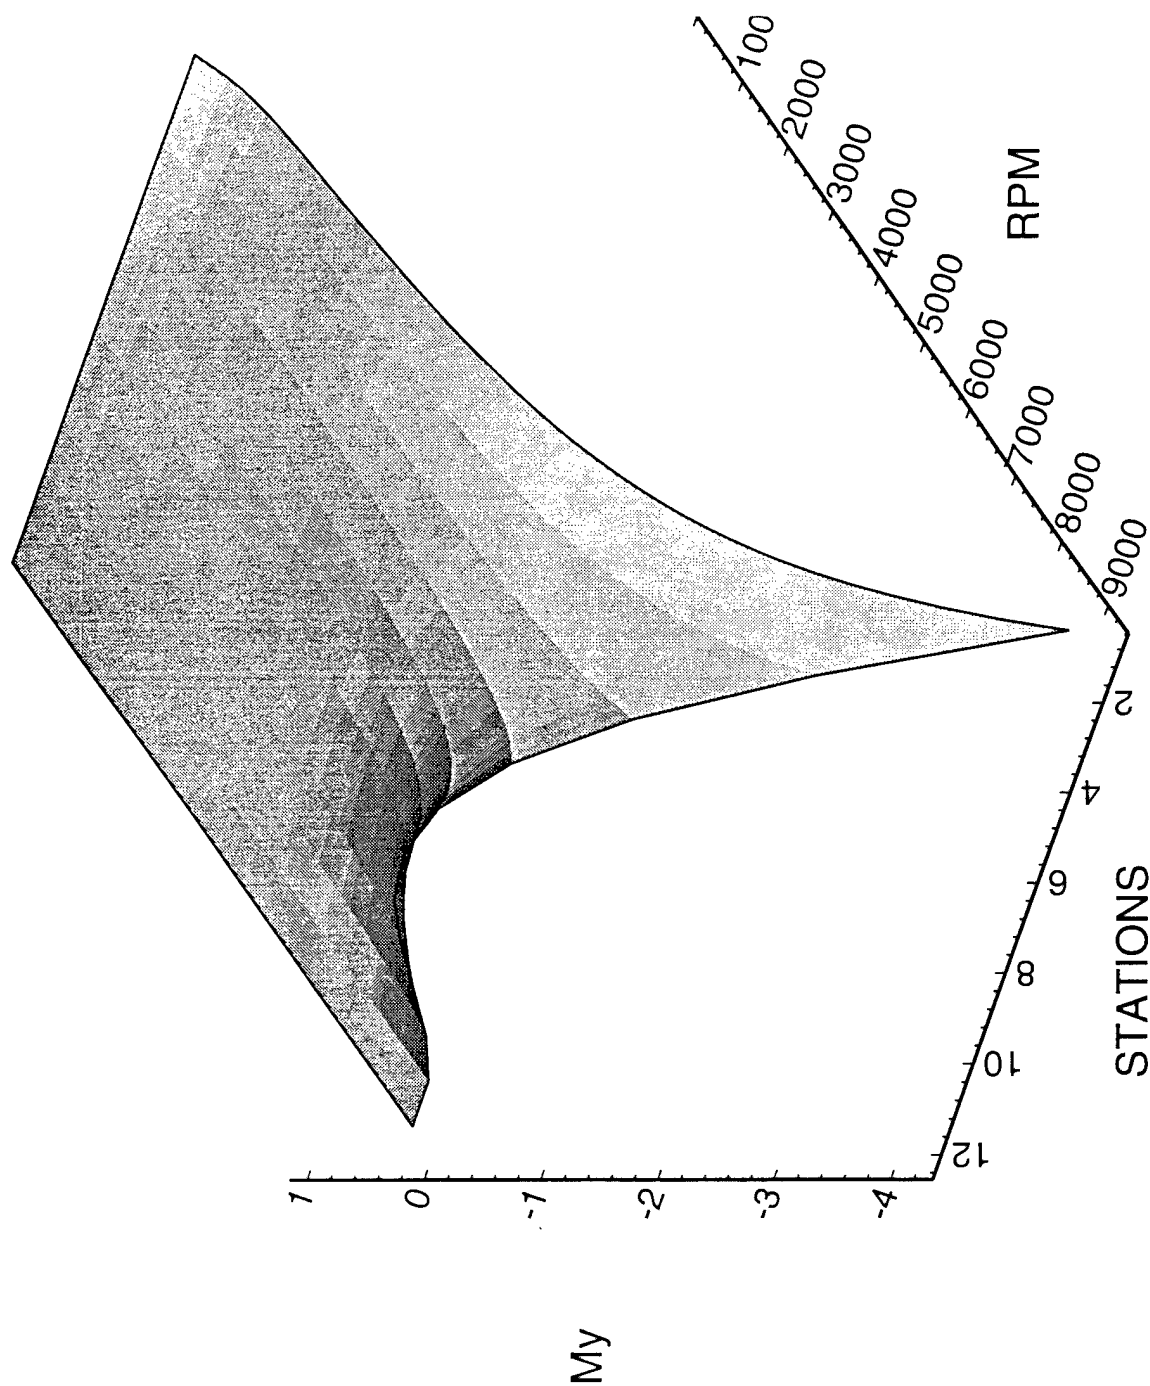


Figure 4. Distribution of Transverse Moment Along Blade Stations for Variable Revolutions Per Minute.

4. References

- Anderson, R. A. *Fundamentals of Vibrations*. New York: Macmillan Company, 1967.
- Andronow, A., and S. Chaiken. *Theory of Oscillations*. Moscow, 1937. English translation by S. Lefschitz, Princeton, NJ: Princeton University Press, 1949.
- Crandal, S. H. *Engineering Analysis*. New York: McGraw-Hill Book Company, 4th ed., 1956.
- Cunningham, W. J. *Introduction to Nonlinear Analysis*. New York: McGraw-Hill Book Company, 1958.
- Den Hartog, J. P. *Mechanical Vibrations*. New York: McGraw-Hill Book Company, 4th ed., 1956.
- Harris, C. M., and C. E. Crede (eds.). *Shock and Vibration Handbook*. New York: McGraw-Hill Book Company, 1961.
- Helfman, R., J. Dumer, and T. Hanratty. "Turbine Engine Diagnostics." ARL-TR-856, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, September 1995.
- Kelly, R. D., and G. Richman. "Principles and Techniques of Shock Data Analysis." SVM-5, Shock and Vibration Information Center, U.S. Department of Defense, 1971.
- Meirovitch, L. *Analytical Methods in Vibrations*. New York: Macmillan Company, 1967.
- Minorisky, N. *Nonlinear Oscillations*. Princeton, NJ: D. Van Nostrand Company, 1962.
- Stoker, J. J. *Nonlinear Vibrations*. New York: Interscience Publishers, Inc., 1950.
- Timoshenko, S., D. H. Young, and W. Weaver, Jr. *Vibration Problems in Engineering*. New York: John Wiley and Sons, 4th ed., 1967.
- Tong, K. N. *Theory of Mechanical Vibration*. New York: John Wiley and Sons, 1960.
- Tse, F. S., I. E. Morse, and R. Hinkle. *Mechanical Vibrations*. Allyn and Bacon, Inc., 2nd ed., 1978.
- Vernon, J. B. *Linear Vibration Theory*. New York: John Wiley and Sons, 1967.

INTENTIONALLY LEFT BLANK.

NO. OF
COPIES ORGANIZATION

2 DEFENSE TECHNICAL
INFORMATION CENTER
DTIC DDA
8725 JOHN J KINGMAN RD
STE 0944
FT BELVOIR VA 22060-6218

1 HQDA
DAMO FDQ
DENNIS SCHMIDT
400 ARMY PENTAGON
WASHINGTON DC 20310-0460

1 CECOM
SP & TRRSTRL COMMCTN DIV
AMSEL RD ST MC M
H SOICHER
FT MONMOUTH NJ 07703-5203

1 PRIN DPTY FOR TCHNLGY HQ
US ARMY MATCOM
AMCDCG T
M FISETTE
5001 EISENHOWER AVE
ALEXANDRIA VA 22333-0001

1 PRIN DPTY FOR ACQUSTN HQS
US ARMY MATCOM
AMCDCG A
D ADAMS
5001 EISENHOWER AVE
ALEXANDRIA VA 22333-0001

1 DPTY CG FOR RDE HQS
US ARMY MATCOM
AMCRD
BG BEAUCHAMP
5001 EISENHOWER AVE
ALEXANDRIA VA 22333-0001

1 DPTY ASSIST SCY FOR R&T
SARD TT T KILLION
THE PENTAGON
WASHINGTON DC 20310-0103

1 OSD
OUSD(A&T)/ODDDR&E(R)
J LUPO
THE PENTAGON
WASHINGTON DC 20301-7100

NO. OF
COPIES ORGANIZATION

1 INST FOR ADVNCD TCHNLGY
THE UNIV OF TEXAS AT AUSTIN
PO BOX 202797
AUSTIN TX 78720-2797

1 DUSD SPACE
1E765 J G MCNEFF
3900 DEFENSE PENTAGON
WASHINGTON DC 20301-3900

1 USAASA
MOAS AI W PARRON
9325 GUNSTON RD STE N319
FT BELVOIR VA 22060-5582

1 CECOM
PM GPS COL S YOUNG
FT MONMOUTH NJ 07703

1 GPS JOINT PROG OFC DIR
COL J CLAY
2435 VELA WAY STE 1613
LOS ANGELES AFB CA 90245-5500

1 ELECTRONIC SYS DIV DIR
CECOM RDEC
J NIEMELA
FT MONMOUTH NJ 07703

3 DARPA
L STOTTS
J PENNELLA
B KASPAR
3701 N FAIRFAX DR
ARLINGTON VA 22203-1714

1 SPCL ASST TO WING CMNDR
50SW/CCX
CAPT P H BERNSTEIN
300 O'MALLEY AVE STE 20
FALCON AFB CO 80912-3020

1 USAF SMC/CED
DMA/JPO
M ISON
2435 VELA WAY STE 1613
LOS ANGELES AFB CA
90245-5500

NO. OF
COPIES ORGANIZATION

- 1 US MILITARY ACADEMY
MATH SCI CTR OF EXCELLENCE
DEPT OF MATHEMATICAL SCI
MDN A MAJ DON ENGEN
THAYER HALL
WEST POINT NY 10996-1786
- 1 DIRECTOR
US ARMY RESEARCH LAB
AMSRL CS AL TP
2800 POWDER MILL RD
ADELPHI MD 20783-1145
- 1 DIRECTOR
US ARMY RESEARCH LAB
AMSRL CS AL TA
2800 POWDER MILL RD
ADELPHI MD 20783-1145
- 3 DIRECTOR
US ARMY RESEARCH LAB
AMSRL CI LL
2800 POWDER MILL RD
ADELPHI MD 20783-1145

ABERDEEN PROVING GROUND

- 3 DIR USARL
AMSRL CI LP (305)

NO. OF COPIES	ORGANIZATION
------------------	--------------

1	DIR USARL AMSRL IS J GANTT 2800 POWDER MILL RD ADELPHI MD 20783-1197
---	--

1	DIR USARL AMSRL IS C COL M KINDL GIT 115 O'KEEFE BLDG ATLANTA GA 30332-0800
---	---

ABERDEEN PROVING GROUND

7	DIR, USARL AMSRL IS C R HELFMAN J DUMER B BROOME T KORJACK (4 CP)
---	--

INTENTIONALLY LEFT BLANK.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
<small>Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project(0704-0188), Washington, DC 20503.</small>				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE August 1997		3. REPORT TYPE AND DATES COVERED Final, Sep 96 - Feb 97
4. TITLE AND SUBTITLE A Twisted Turbine Blade Analysis for a Gas Turbine Engine			5. FUNDING NUMBERS 4B010503350000	
6. AUTHOR(S) T. A. Korjack				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-IS-CI Aberdeen Proving Ground, MD 21005-5067			8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TR-1469	
9. SPONSORING/MONITORING AGENCY NAMES(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) An analysis of a twisted turbine blade was performed to determine the regions of maximum stress and moment which occur on a typical gas turbine engine under variable revolutions per second. An extension of the Holzer and Myklestad methods was developed to simulate shear and moment effects occurring from the root of the blade to its outermost extremity. Under numerical simulations, shear force and moments of inertia were realized at changing revolutions per minute by solving the Den Hartog twisted blade equations.				
14. SUBJECT TERMS twisted turbine blade, vibrations, shear stress and moments			15. NUMBER OF PAGES 19	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

INTENTIONALLY LEFT BLANK.

USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. ARL Report Number/Author ARL-TR-1469 (Korjack) Date of Report August 1997

2. Date Report Received _____

3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) _____

4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) _____

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. _____

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) _____

CURRENT
ADDRESS

Organization

Name

E-mail Name

Street or P.O. Box No.

City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

OLD
ADDRESS

Organization

Name

Street or P.O. Box No.

City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)
(DO NOT STAPLE)

DEPARTMENT OF THE ARMY


OFFICIAL BUSINESS

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 0001,APG,MD

POSTAGE WILL BE PAID BY ADDRESSEE

DIRECTOR
US ARMY RESEARCH LABORATORY
ATTN AMSRL IS CI
ABERDEEN PROVING GROUND MD 21005-5067



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

